



产品特点

1. Magnetically operated level detection
2. Simple structure, easy to install
3. Easy to maintain and adjust
4. Short response time and wide application

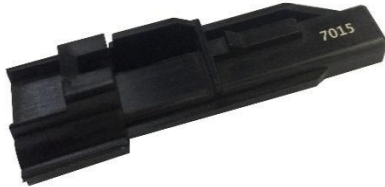

产品尺寸 (单位: mm)

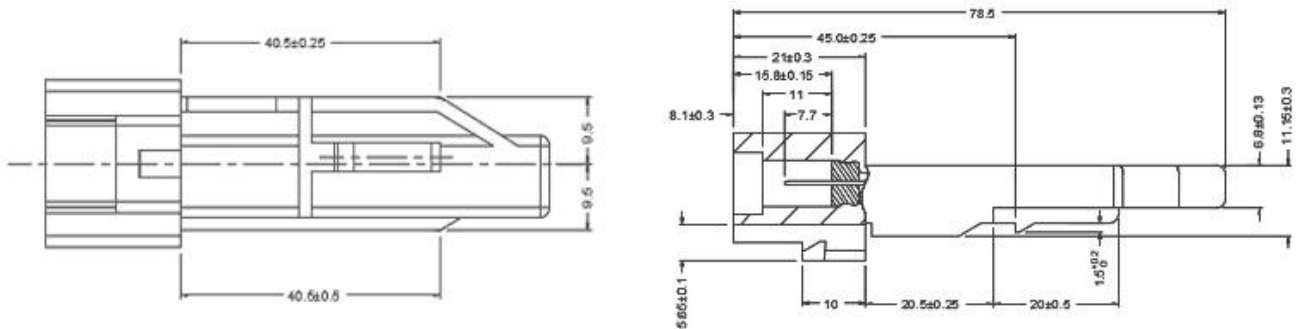

产品规格

Parameter	Rating
Contact Form	A type (normal open) contact
Sensor Working Distance ON	3.3 – 5.3mm
Sensor Working Distance OFF	4.1 – 7.8mm
Max. Contact Rating	10W
Max. Switching Voltage	DC 100V
Max. Carrying Current	DC 1.0A
Max. Switching Current	DC 0.4A
Initial Contact Resistance	600 mΩ Max

Insulation Resistance	$2 \times 10^7 \Omega$ Min. (DC 500V)
Breakdown Voltage	DC100V, 1.0G Ω Min
Electrical Life	10^5 operations Min. (DC 13V, Load R51 Ω)
Shock Resistance	38G Max
Mechanical Life	720000 operations Min. (No load)
Connector Pull	≥ 80 N Min.
Operating Temperature	-40°C ~ +120°C
Operating Humidity	RH 95% Max